

SERIES 3000-T

ANCHOR LOCATION WORKSHEET NAIL-ON FRAME

FRAME ANCHOR CHECKLIST	
FASTENER TYPE	
MINIMUM EMBEDMENT	
MINIMUM EDGE DISTANCE	
ANCHOR LOCATIONS	
FROM ENDS	

ON CENTER

INSTALLER NOTE: SILICONE SEALANT BEAD INSTALLER NOTE: ON HEAD AND JAMBS. FLASHING PAPER (BEHIND NAIL-FIN) INSTALLER NOTE: (ON TOP OF NAIL-FIN) SIZE AND SPACING OF FASTENERS
PER LOCAL CODE. (TYPICAL)
(NOT BY FLEETWOOD) INSTALLER NOTE: SEAL FASTENER HEADS WITH COMPATIBLE SEALANT AS SHOWN. (TYPICAL) INSTALLER NOTE: SOLID SHIMS AT ANCHOR STUCCO-LOCATIONS REQUIRED. (TYPICAL) (NOT BY FLEETWOOD) DOOR HEAD **EXTERIOR** SCALE: 6" = 1'SILL PAN ATTACH SILL TO SILL PAN AS NOTED IN SET SILL PAN IN FULL INSTALLATION INSTRUCTIONS BED OF SEALANT. DOOR SILL 2

SILL DISCLAIMER: IT IS THE MANUFACTURERS DESIRE FOR THE INSTALLER TO NOT PIERCE THE SILL. IN SOME CASES THE CODE OR SPECIFICATIONS REQUIRE SUCH. IN THESE CASES THE INSTALLER IS RESPONSIBLE TO SEAL THESE BREACHES

SCALE: 6" = 1'



SERIES 3000-T

ANCHOR LOCATION WORKSHEET BLOCK FRAME


FRAME ANCHOR CHECKLIST FASTENER TYPE

MINIMUM EMBEDMENT MINIMUM EDGE DISTANCE

ANCHOR LOCATIONS

FROM ENDS

ON CENTER

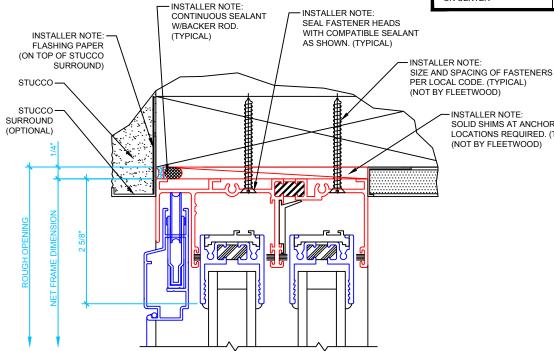

INSTALLER NOTE: SOLID SHIMS AT ANCHOR LOCATIONS REQUIRED. (TYPICAL) (NOT BY FLEETWOOD)

DOOR HEAD 1 **EXTERIOR** SCALE: 6" = 1' SUL SILL PAN ATTACH SILL TO SET SILL PAN IN FULL SILL PAN AS NOTED IN INSTALLATION INSTRUCTIONS BED OF SEALANT. DOOR SILL 2 SCALE: 6" = 1'

SILL DISCLAIMER: IT IS THE MANUFACTURERS DESIRE FOR THE INSTALLER TO NOT PIERCE THE SILL. IN SOME CASES THE CODE OR SPECIFICATIONS REQUIRE SUCH. IN THESE CASES THE INSTALLER IS RESPONSIBLE TO SEAL THESE BREACHES

DWG NO.: SERIES 3000-T ANCHOR LOCATION-BLOCK

SHEET: 1 OF 1 DATE: SIGNATURE