

# Testing Evaluation Laboratories, Inc.

2002 Wood Court Suite 1 – Plant City, FL 33563 Phone: 813-754-9887

AAMA/WDMA/CSA/101/I.S.2/A440-08 AAMA/WDMA/CSA/101/I.S.2/A440-11 (A440S1-09)

**TEST REPORT SUMMARY** 

**Test Report Issued To:** 

**Fleetwood Windows and Doors** 1 Fleetwood Way Corona, CA 92879

## 3900-T Aluminum Side Hinged Door - Outswing **Impact Rated**

Title	Summary of Results
	Specimen 14
Primary Product Designator	Class LC –PG65 1219 x 3048 (48 x 120) – Type SHD
Design Pressure	+ 3112 Pa / - 3112 Pa (+ 65.0 psf / - 65.0 psf)
Air Infiltration	0.40 L/s/m <sup>2</sup> (0.079 scfm/ft <sup>2</sup> ) @ 75 Pa (1.57 psf)
Air Infiltration/Exfiltration (A440S1-09)	Level A3: <.50 L/s●m²
Water Resistance (Per ASTM E547-00)	467 Pa (9.75 psf)
Structural Test Pressure	+ 4668 Pa /- 4668 Pa (+ 97.5 psf / - 97.5 psf)
Forced Entry	No Entry

Reference should be made to Report No. TEL 01991340 for complete test specimen description and data.

For Testing Evaluation Laboratories, Inc.

Vivian K. Wright,

President



# **Testing Evaluation Laboratories, Inc.**

2002 Wood Court Suite 1 – Plant City, FL 33563 Phone: 813-754-9887

### AAMA/WDMA/CSA 101/I.S.2/A440-08 and A440-11 (A440S1-09)

#### Issued to:

Fleetwood Windows and Doors
1 Fleetwood Way
Corona, CA 92879

IAS Lab Certification Number TL-299

Report Number:

TEL 01991340

**Test Date:** 

March 16, 2015

Report Date:

June 26, 2015

Project Summary: Testing Evaluation Laboratories, Inc. (TEL) was contracted to perform tests on a Fleetwood Windows and Doors 3900-T Aluminum Side Hinged Door at TEL's Plant City, FL test facility. The sample tested successfully met the performance requirements as follows:

Class LC-PG65 1219 x 3048 (48 x 120) – Type SHD – Specimen 14

Test Specifications: The test specimen was evaluated in accordance with the following: AAMA/WDMA/CSA/101/I.S.2/A440-08 and A440-11 (A440S1-09)
Standard/Specification for Windows, Doors and Unit Skylights

Series / Model:

3900-T Aluminum Door

Type:

Impact Rated Outswing Glazed Door (X)

Overall Size:

1219 mm (48.00") x 3048 mm (120.00")

Daylight Opening:

889 mm (35.00") x 2743 mm (108.00")

For complete product description, see attached drawing L-7352 for details.

Test Results: Specimen 14

1219 mm (48.00") x 3048 mm (120.00") - Outswing Glazed Door (X)

### The test results are tabulated as follows:

<u>Paragraph</u>	Title of Test / Test Method	<u>Results</u>	Allowed
5.3.1.2.1	Force to Latch – Multipoint Locking Device	78N (17.5 lbf)	Report Only
5.3.2.1	Air Leakage Resistance (Infiltration) ASTM E283 Test conducted @ 75 Pa (1.57 psf)	0.40 L/s/m² 0.079 scfm/ft²	1.50 L/s/m² 0.3 scfm/ft²
5.3.3.1	Limited Water Penetration Resistance ASTM E547 & ASTM E333	L	
	Test conducted @ 467 Pa (9.75 psf) (Std. Weatherstrip)	No Leakage	No Leakage
5.3.4.2	Uniform Load Deflection Test @ Design Pressure ASTM E330		(See Note #1)
5.3.4.3	Uniform Load Structural Test @ 150% of Design Pressure ASTM	E330	(See Note #1)
Note #1:	(Client opted to start at a pressure higher than the minimum recresults are listed under "Optional Performance".)	quired. Those	
5.3.5	Forced Entry Resistance AAMA 1304		
	1330 N (300 lbf) point load		
	Top lock stile corner	No Entry	No Entry
	Bottom lock stile corner	No Entry	No Entry
	Above lock	No Entry	No Entry

#### **Test Results**

Spec. 14 1219 mm (48.00") x 3048 mm (120.00") - Outswing Glazed Door (X) Cont:

#### **Optional Performance**

	Description of the Control of the Co	No. of the control of				
5.3.4.2	I In if a war	Load Deflection	Tast O	D:	D	ACTA A FOOD
3.3.4./	Uniiorm	Load Deflection	Lest (a)	Design	Pressure	$\Delta \times 11 \text{M} + 3 \times 11$

Load Range	Time (Sec)	Load Pa (psf)	Loc	Deflection mm (inches)	Set mm (inches)	Allowable mm (inches)
Half Test Positive	10	1556 (32.50)				
Test Positive	10	3112 (65.00)	1	2.286 (0.090)	NA	(See Note #2)
			2	1.067 (0.042)	NA	(See Note #2)
Half Test Negative	10	1556 (32.50)				
Test Negative	10	3112 (65.00)	1	1.727 (0.068)	NA	(See Note #2)
			2	2.159 (0.085)	NA	(See Note #2)

Note #2: The deflections reported are not limited by AAMA/WDMA/CSA101/I.S.2/

A440-08 and A440-11(A440S1-09) for this product designation. The deflection data is recorded in this report for special code compliance and information only

#### 5.3.4.3 Uniform Load Structural Test @ 150% of Design Pressure ASTM E330

Load Range	Time (Sec)	Load Pa (psf)	Loc	Deflection mm (inches)	Set mm (inches)	Allowable mm (inches)
Half Proof Positive	10	2334 (48.75)				
Proof Positive	10	4668 (97.50)	1	3.607 (0.142)	0.025 (0.001)	4.318 (0.170)
			2	1.219 (0.048)	0.356 (0.014)	4.978 (0.196)
Half Proof Negative	10	2334 (48.75)				
Proof Negative	10	4668 (97.50)	1	6.223 (0.245)	0.203 (0.008)	4.318 (0.170)
			2	3.794 (0.147)	0.305 (0.012)	4.978 (0.196)

Note #3: Deflection / Set for Location 1 measured at top of door panel at latch stile.

Deflection/Set for Location 2 measured at bottom of door panel at latch stile.

<u>Paragraph</u>	<u>Title of Test / Test Method</u>	<u>Results</u>	Allowed
5.3.2.1	Air Leakage Resistance (Exfiltration) ASTM E283	0.22 L/s/m <sup>2</sup>	
	Test conducted @ 75 Pa (1.57 psf)	0.044 scfm/ft <sup>2</sup>	0.3 scfm/ft <sup>2</sup>
	Air Leakage Resistance (Infiltration) ASTM E283	0.11 L/s/m <sup>2</sup>	
	Test conducted @ 299 Pa (6.24 psf)	0.022 scfm/ft <sup>2</sup>	1.5 scfm/ft <sup>2</sup>
	Air Leakage Resistance (Exfiltration) ASTM E283	1.89 L/s/m <sup>2</sup>	
	Test conducted @ 299 Pa (6.24 psf)	0.378 scfm/ft <sup>2</sup>	1.5 scfm/ft <sup>2</sup>

Conditions, Terms, and General Notes Regarding These Tests

The product tested <u>Has Been</u> compared to the detailed drawing, bill of materials and fabrication information supplied by the client so named herein. Our analysis, which includes dimensional and component description comparisons, indicate the tested product and engineering information supplied by the client "Are Equivalent".

The report and representative samples will be retained for four years from the date of initial test.

These test results were obtained by employing all requirements of the designated test methods with no Deviations unless explicitly noted in test report. The test results and specimen supplied for testing are in compliance with the reference.

The test results are specific to the product tested by this laboratory and of the sample supplied by the client named herein, and they relate to no other product either manufactured by the client, a fabricator of the client or of the client or of installed field performance.

This test report does not constitute certification of this product, but only that the above test results were obtained using the designated test methods and they indicate compliance with the performance requirements (paragraphs as listed) of the above referenced specifications.

Testing Evaluation Laboratories, Inc. makes no opinions or endorsements regarding this product and its performance. This report may not be reproduced or quoted in partial form without the expressed written approval of Testing Evaluation Laboratories, Inc.

Testing Evaluation Laboratories, Inc.'s letter, reports, its name or insignia or mark are for the exclusive use of the client so named herein and any other use is strictly prohibited. The report, letters and the name of Testing Evaluation Laboratories, Inc., its seal or mark shall not be used in any circumstance to the general public or in any advertising.

Limitation of liability: Due diligence was used in performing the tests and reporting the results. By acceptance of this report, this client agrees to hold harmless and indemnify Testing Evaluation Laboratories, Inc., its employees, sub-contractors and officers and owners against all claims and demands of any kind whatsoever, which arise out of or in any manner connected with the performance of work referred to herein.

Testing Evaluation Laboratories, Inc.

Union K. Wright,

President

# **Revision Log**

Rev Number	<u>Date</u>	<u>Pages</u>	Revision(s)
0	6/26/2015	NA	Original Report Issue

	TABLE OF CONTENTS				
SHEET #	DESCRIPTION				
1	Table of contents				
2	Test elevation				
3	Horizontal cross sections				
4	Horizontal cross sections				
5	Vertical cross sections				
6	Vertical cross sections				
7	Frame anchoring				
8	Components and glazing detail				
9	Bill of materials				

Testing Evaluation Laboratories Inc.
Specimen Complies with Drawing
Deviations Noted - TEL#\_ 01991340
Date\_ 6/26/15 Verified by


PRODUCT:		SPEC. #14		PART OR ASSEMBLY:	OF 17 17 17 17 17 17 17 17 17 17 17 17 17	IABLE OF CONTENTS		
						ΒY		
						NO, DATE	REVISIONS	NTS INC.
						ž		ULTA
0	BUILDING CONSULTANTS, INC. 813.659.9197							R.W. BUILDING CONSULTANTS INC.
_	DATE: 3/17/15 SCALE: N.T.S. DWG. BY: JK CHK. BY: LFS							BUILE
DW	G.	BY:			JK			×.
CHI	CHK. BY: LFS							ď

DRAWING NO.:

L-7352

2015


SHEET <u>1</u> OF <u>9</u>

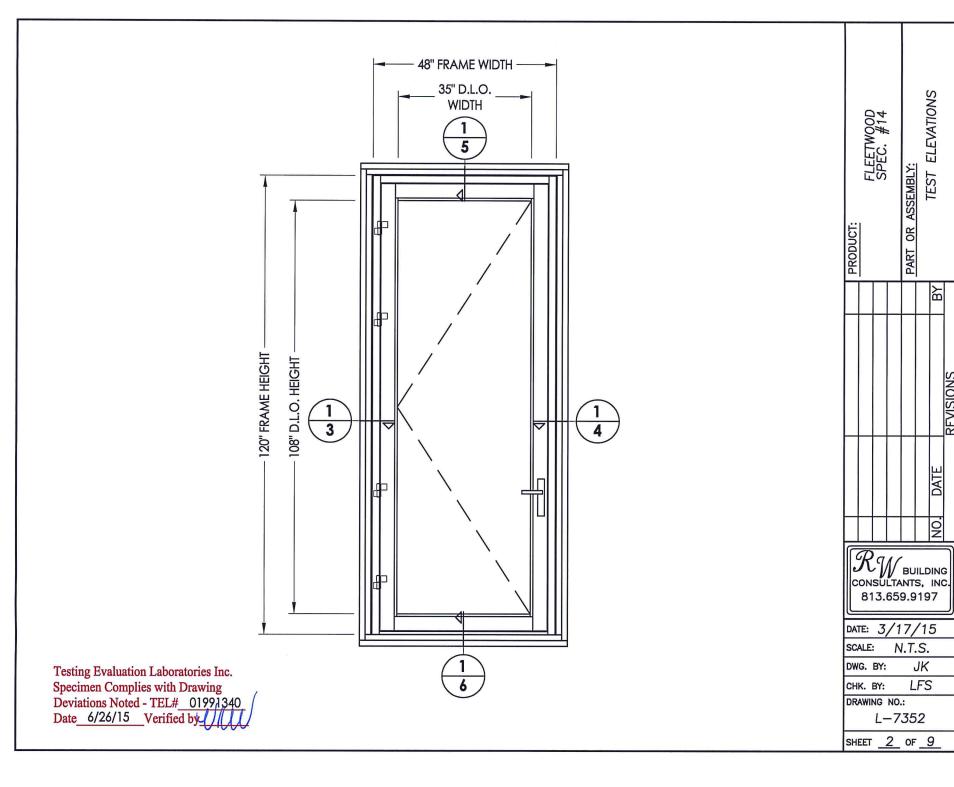

R.W. BUILDING CONSULTANTS INC. 2015

TEST ELEVATIONS

B

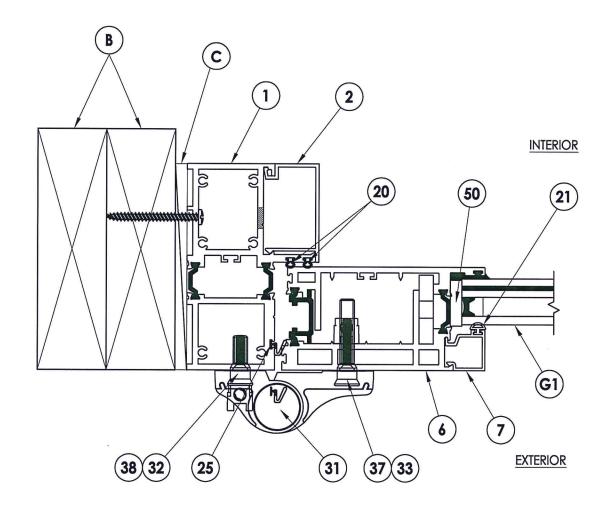

Testing Evaluation Laboratories Inc.
Specimen Complies with Drawing
Deviations Noted - TEL# 01991340
Date 6/26/15 Verified by 1

HORIZONTAL CROSS SECTION

PRODUCT:		SPEC. #14	ll .	PART OR ASSEMBLY:	THE COLUMN	HORIZONIAL CBOSS SECTIONS	CNOSS SECTIONS
						BY	
							REVISIONS
						DATE	
						NO.	
$\mathbb{R}_{\mathbb{W}_{BUILDING}}$							

CONSULTANTS, INC. 813.659.9197

DATE: 3/17/15 N.T.S. SCALE:


JK DWG. BY: LFS

CHK. BY:

DRAWING NO .:


L-7352

SHEET <u>3</u> OF <u>9</u>

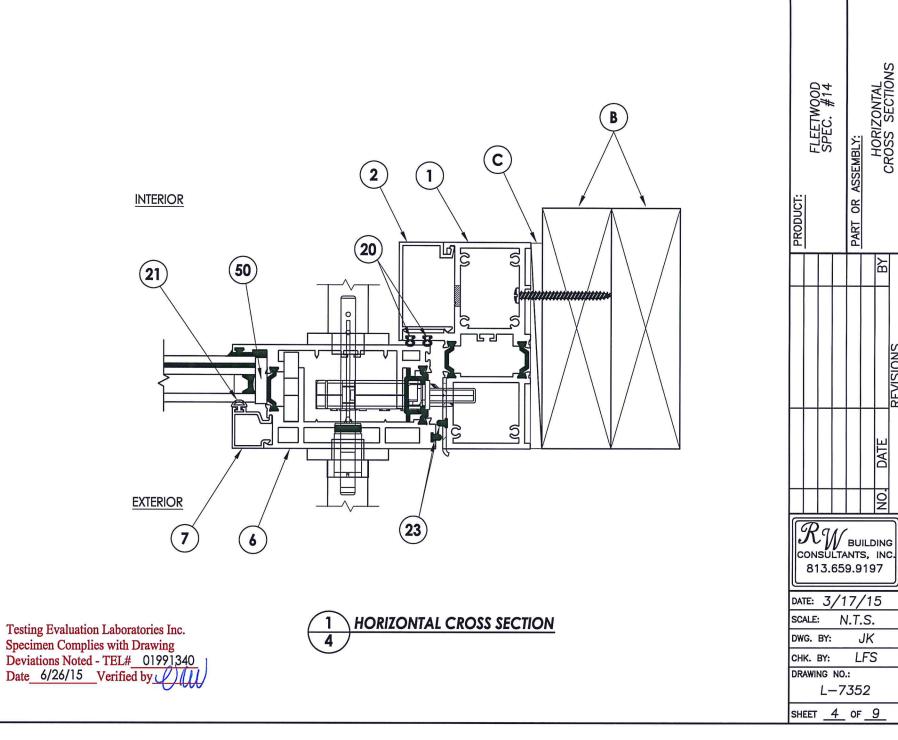


BY

NO.

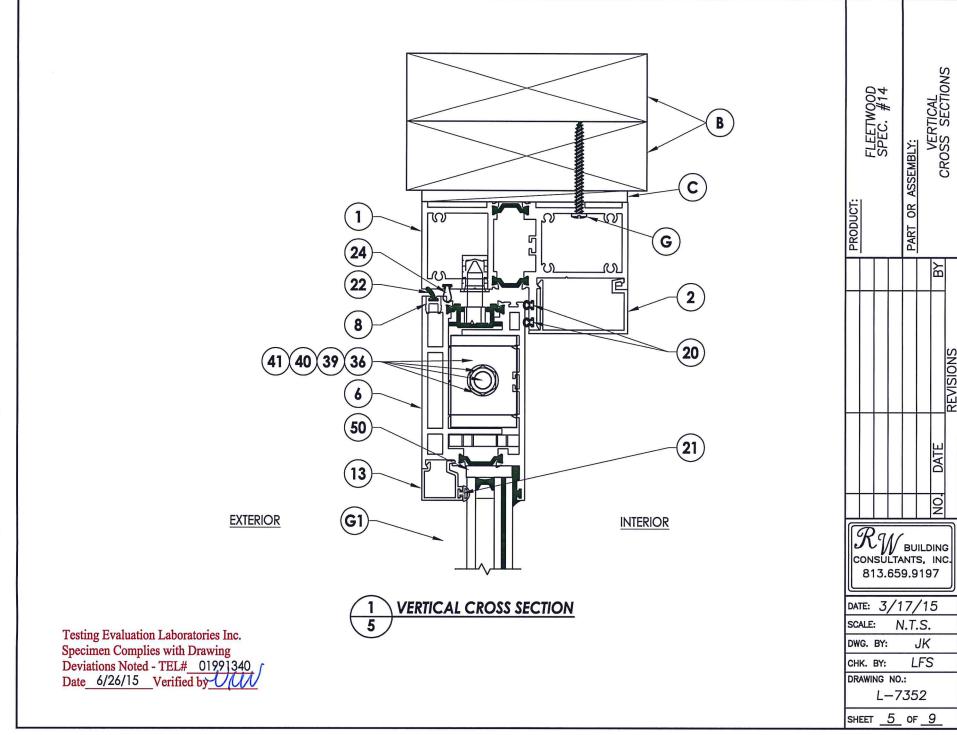

2015 R.W. BUILDING CONSULTANTS INC.

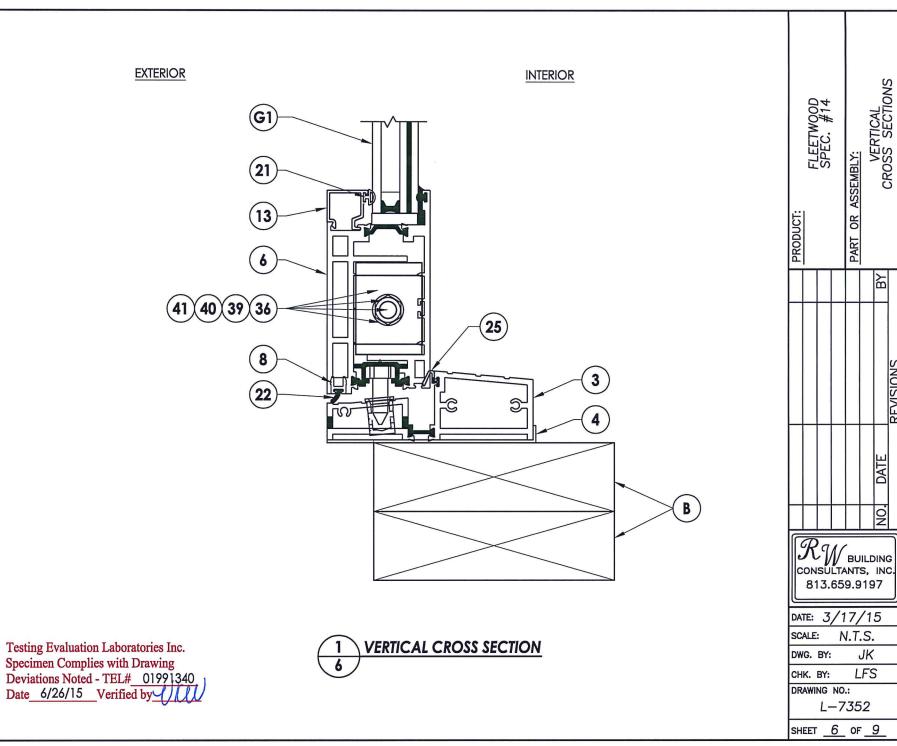

VERTICAL CROSS SECTIONS


品

NO.

JK

LFS

PART OR ASSEMBLY:

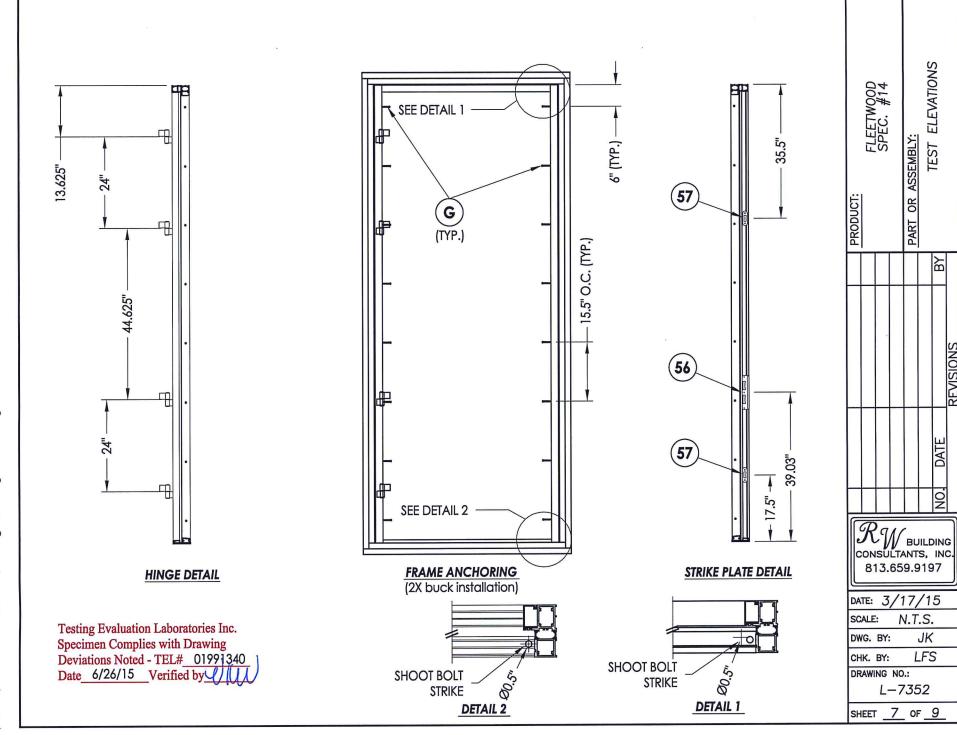

BUILDING CONSULTANTS INC

М. .

2015

	BILL OF MATERIALS						
ПЕМ #	DESCRIPTION	PART#	MATERIAL				
В	2X BUCK SG >= 0.55		WOOD				
С	1/4" MAX. SHIM SPACE		-				
G	#10 x 2" PPH WOOD SCREW		STEEL				
1	FRAME	3911	6063-T6 ALUM				
2	FRAME SNAP-IN	3912	6063-T6 ALUM				
3	OUT-SWING SILL	3202	6063-T6 ALUM				
4	SILL PAN	-	_				
6	SASH	3902	6063-T6 ALUM				
8	ATLANTIC SEAL CLIP	3916	6063-T6 ALUM				
13	1" GLASS STOP	3908	6063-T6 ALUM				
20	BULB VINYL - MINI (EPDM 70 Durometer)	25199	TREMCO, # TX20801E				
21	BULB VINYL - LARGE (EPDM 70 Durometer)	25031	TREMCO, # TX19638E				
22	FOAM SEAL	25196	EMESBURY, # 32390				
23	Q-LON FOAM SEAL	25189	SCHLEGEL CORP., # Q225T190				
24	Q-LON FOAM SEAL	25058					
25	Q-LON FOAM SEAL	25059	SCHLEGEL CORP., # QEZ 376				
31	BUTT HINGE	_	SAVIO				
32	BACK UP KIT	20535	SAVIO				
33	HINGE BOLT, 8M X 48MM (FOR PANEL)	25026	SAVIO				
36	BACK UP PLATE FOR CORNER BLOCK	25025	-				
37	MACHINE SCREW NO 10-32, FHP 1.125"	25074	STAINLESS STEEL				
38	MACHINE SCREW NO 10-32, FHP .75"	25073	STAINLESS STEEL				
39	HEX HEAD CAP SCREW .375-16, 2.250"	25175	STAINLESS STEEL				
40	.375-16 SS. HEX NUT	25023	STAINLESS STEEL				
41	.375 SPLIT LOCK WASHER	25024	STAINLESS STEEL				
50	4" LONG SETTING BLOCK	18620	-				
56	LATCH AND DEADBOLT STRIKE PLATE	-	-				
57	STRIKE PLATE		-				

Testing Evaluation Laboratories Inc.
Specimen Complies with Drawing
Deviations Noted - TEL# 01991,340
Date 6/26/15 Verified by D

PRODUCT:	SPEC: #14	PART OR ASSEMBLY:	BILL OF MAIERIALS		
				BY	
					REVISIONS
				DATE	
				NO.	

RW BUILDING CONSULTANTS, INC. 813.659.9197

DATE: 3/17/15 N.T.S.

SCALE: JK

DWG. BY:

LFS CHK. BY:

DRAWING NO.: L-7352

SHEET 9 OF 9