

**Table of Contents**

**I. Care and Maintenance..... 2**

**II. Tools / Materials, Sealant Requirements, & Load / Anchor Instructions..... 2**

**III. Assembly and Installation ..... 2**

**IV. Structure Verification & Sillpan Installation ..... 3**

    1. Opening Verification ..... 3

    2. Pre-Fit and Leveling ..... 3

    3. Sill-pan Installation ..... 4

**V. Window Installation ..... 5**

    1. Nail-fin Frames ..... 5

    2. Block Frames ..... 6

    3. Uneven Leg Frame ..... 6

**VI. Glazing Instructions ..... 9**

    Dry Glazing Procedure ..... 9

    Alternate Glazing Procedure ..... 9

**VII. Corner Butt Glazing ..... 10**

**VIII. Flashing after Installation ..... 12**

**Appendix A: Joining Sill-pans ..... 13**

**Appendix B: Hinged Screen Installation ..... 14**

**Appendix C: Panelized Window Installation ..... 15**

## I. Care and Maintenance

**Operational Warning:** Fleetwood products operate smoothly and special care should be taken by the owner to make sure users are not injured.

This product is factory finished. Please handle with extreme care. Protect all exposed surfaces from contact with caustics, corrosives, solvents, abrasions, impacts, wet packing material etc.

**FAILURE TO DO SO WILL NULLIFY THE WARRANTY.** Before **ANY CLEANING**, review the Care & Maintenance Instructions (go to [www.fleetwoodusa.com](http://www.fleetwoodusa.com) for more information). **Contact the local dealer with any questions or concerns.** Fleetwood strongly recommends that all products be cleaned after installation and totally protected from construction debris and equipment.

## II. Tools / Materials, Sealant Requirements, & Load / Anchor Instructions

**Tools Required:** Tape measure, level, shims, nails, hammer, putty knife, screws, Sealant, caulk gun, backer Rod, 6mm hex wrench, scissors or utility knife, drill bit, drive bit and powered drill.

### Sealant Requirements

- The sealant referred to within this document for seals associated with the assembly of the product should conform to **AAMA 800**. It may be a sealant recommended and approved by the sealant manufacturer that is compatible with the framing, finish and surrounding materials.
- All sealant bead sizes must conform to the sealant manufacturers' size requirements.
- The Owner / General Contractor is responsible for identifying the need for any additional sealant to be applied by others. Such sealant shall be elastomeric material, with the framing, finish and surrounding materials.

### Load / Anchor Instructions

- Live or Dead Loads can affect product functionality, loads shall be designed to withstand the most critical effects of load factors and load combinations as required by building code.
- Fleetwood requires maximum vertical deflection of the header not to exceed  $\text{Span}/720$  or  $1/8''$
- Structural engineer to determine anchor quantity and spacing for design load requirements.
- Proper isolating material must be between dissimilar surfaces (i.e. block/concrete & aluminum).

## III. Assembly and Installation

**General:** The key to any window or door installation is preparation. This extends from storage of the product to the final installation and to all points in between. Careful planning and attention to detail can help ensure proper installation.

**It is essential that each Fleetwood product be assembled and glazed in accordance with AAMA standards and factory instructions.** It is the installer's responsibility to ensure that each Fleetwood product is assembled, glazed and installed and completely sealed to ensure that the product is leak-free and operates correctly. **Installation of Fleetwood products must be in accordance with the standards set forth in ASTM E 2112.** If there are any questions regarding the installation of a Fleetwood product contact the factory customer service department.

Fleetwood has provided this product with recommended field glazed weather-stripping. If the provided weather-stripping does not ensure an optimum fit of glass to frame the Fleetwood Authorized Dealer should contact Customer Service for an expedited **NO CHARGE** shipment of replacement weather-stripping.

#### IV. Structure Verification & Sillpan Installation



**Note:** Sillpan Substitution- If the factory provided pan is not desired, the product warranty will remain intact if the substitute panning system emulates the essential design of the factory pan.

##### 1. Opening Verification

- Check the measurements of the opening and verify that the product will fit into the opening. Measure all four sides of the opening to make sure there is a clearance of 1/2" in width and 1/4" in height.
- Remove the product(s) from the packaging and lay it in front of the opening. Check width and height dimensions.
- Verify the opening is plumb and level.

##### 2. Pre-Fit and Leveling

- Place sill-pan into the opening and determine any leveling that must be done prior to installation
- Shim as necessary to stabilize the entire depth and length of the pan. No unsupported width of more than 8" is allowed. Shim to be load bearing, non-porous, non-absorbent and inorganic.
- If more than 1/8" shim height is required, it is recommended that pouring self-leveling "Rock Hard" (or equal) to achieve level and stable surface.

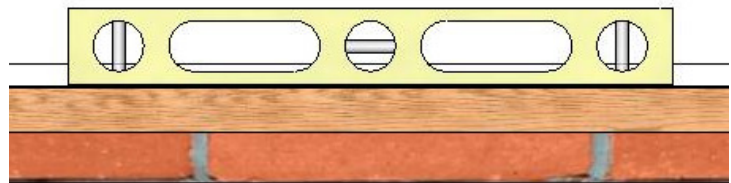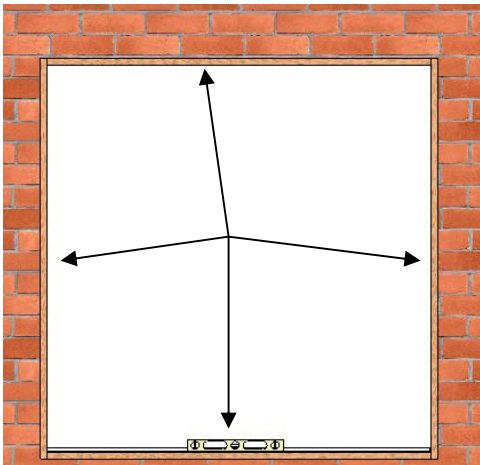


**Figure 1:**  
Use level to determine if the opening is plumb and level


### 3. Sill-pan Installation

**Note:** For splicing and multiple piece Sill-pans – (See Appendix A)


- Apply bituminous paint to raw masonry or concrete at the sill to eliminate electrolytic and chemical reactions. We recommend a PVC liner be placed to ensure separation of the metal frame with the substrate. In balcony situations flash the sill with aluminum or galvanized brake metal (Sill-pan is provided).
- Apply sealant in all corners and seams of the sill-pan (Figure 2).
- With bottom side of sill-pan up, apply a 3/8" bead of compatible sealant 1/2" in from interior leg. Sealant bead to run across the bottom as well as up each vertical leg of the sill pan. Also apply sealant beads near the sides and across the front (Figure 3).
- Secure the sill-pan to the floor with sealant. Position sill pan as necessary to allow for proper installation of frame assembly (Figure 4).

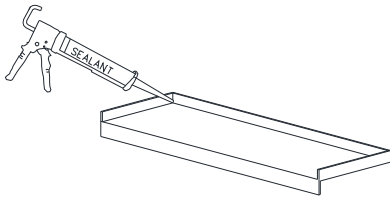

**Figure 2:**  
Seal corners and seams

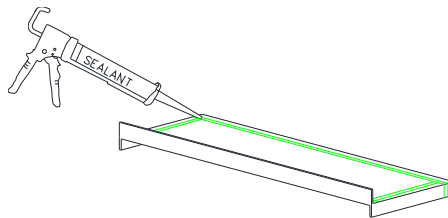


**Figure 3:**  
Seal underside of Sill-pan

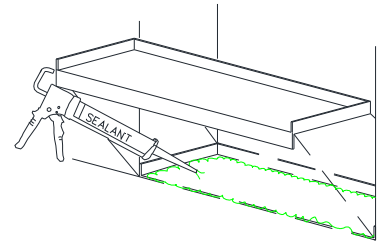

**Figure 4:**  
Set pan in full bed of sealant

## V. Window Installation


- All windows come pre-assembled and glazed unless specified otherwise.
- For Awnings and Hoppers when a limit device is requested, reference the Series 350-T Limit Devices Installation Instructions.
- Inside glazed products-see inside glazed product procedure for frame orientation, page 9.
- Frame installation anchors furnished by installer, not by Fleetwood. Stainless steel screws are recommended.
- Installer responsible to ensure anchors maintain edge distance. For fixed panels, remove glass stops to install anchor screws.
- Before installing the window, apply a continuous bead of sealant along the back and side legs between the sill and sill pan (Figure 5).

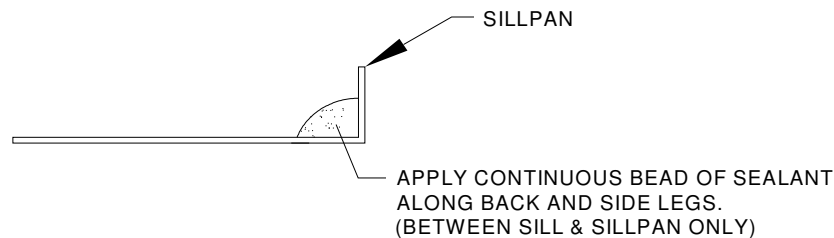

**Figure 5:**  
Pan Sealant Location (Block  
Frame Sillpan Shown)

### 1. Nail-fin Frames


- Prepare the opening to accept the frame ensuring that the weep-screed flashing at the sill is adjusted to maintain a weatherboard style flashing.
- Flashing paper must be applied with galvanized nails or corrosion resistant staples. Flashing paper shall be applied in a weatherboard fashion around the full perimeter of the framed opening.
- Seal all frame and vent joints completely with compatible sealant.
- Apply a heavy bead of sealant to the interior side of the mounting flange (nail-on) where the frame jamb and sill join. Sealant must cover the entire joint (from the flange to the inside leg) and extend 1-1/2" up the jamb and along the sill (Figure 6).
- Apply a continuous bead of sealant along the back and side legs between the sill and sill pan (Figure 9, page 7) and insert the frame into the opening.
- Cross-measure and adjust using non-porous, non-absorbent, inorganic shims to achieve a plumb square and level condition, as well as an even reveal around the framed opening. Ensure shims are in a location to support any loads that are transferred from the anchor to the frame. Seal all fastener heads with compatible sealant. Only drill holes through Sill as required for design load. In these cases, installer to seal these breaches.

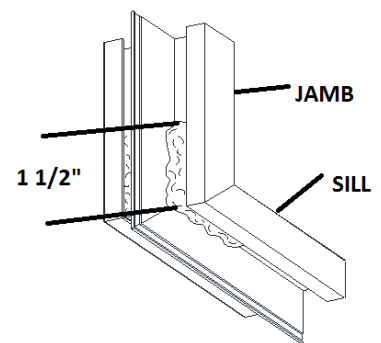

**Figure 6:**  
Nail-fin sealant location

## 2. Block Frames


- Prepare the opening to accept the frame ensuring that the weep-screed flashing at the sill is adjusted to maintain a weatherboard style flashing.
- Seal all frame and vent joints completely with compatible sealant. Apply a heavy bead of sealant to the interior side where the frame jamb and sill join. Sealant must cover the entire joint and extend 1-1/2" up the jamb and along the sill (Figure 7).
- Apply a continuous bead of sealant along the back and side legs between the sill and sill pan (Figure 10, page 7) and insert the frame into the opening.
- Cross-measure and adjust as necessary to achieve a plumb square and level condition, as well as an even reveal around the framed opening. Shim with non-porous, non-absorbent, inorganic shims where needed. Seal all fastener heads with compatible sealant. Only drill holes through Sill as required for design load, installer to seal these breaches.

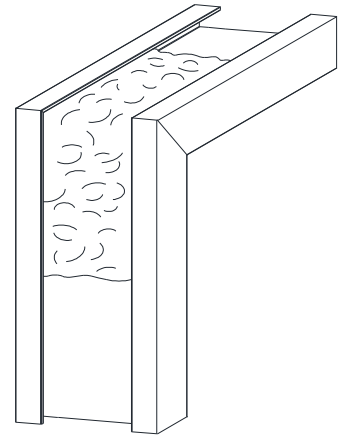


**Figure 7:**  
Block frame sealant  
location

## 3. Uneven Leg Frame


- Prepare the opening to accept the frame ensuring that the weep-screed flashing at the sill is adjusted to maintain a weatherboard style flashing.
- Seal all frame and vent joints completely with compatible sealant. Apply a heavy bead of sealant to the interior side where the frame jamb and sill join. Sealant must cover the entire joint (from the flange to the inside leg) and extend 1-1/2" up the jamb and along the sill (Figure 7).
- Apply a continuous bead of sealant along the back and short leg between the sill and sill pan, and around the entire window frame along the long leg (Figure 10, page 8). Then insert the frame into the opening.
- Cross-measure and adjust as necessary to achieve a plumb square and level condition, as well as an even reveal around the framed opening. Shim with non-porous, non-absorbent, inorganic shims where needed. Seal all fastener heads with compatible sealant. Only drill holes through Sill as required for design load, installer to seal these breaches.

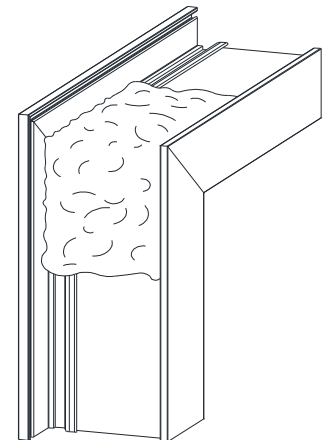


**Figure 8:**  
Block frame sealant  
location

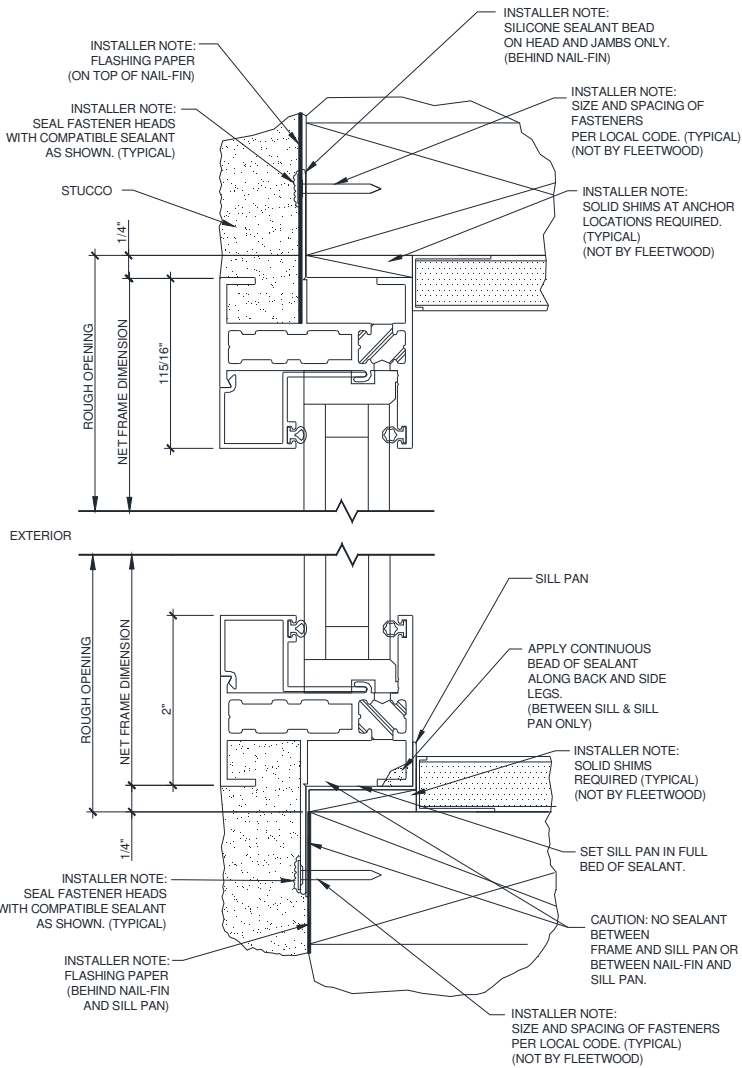

**Figure 9:**  
Nail-Fin Window Installation  
(Fixed Shown, Same for  
Casement / Awning)

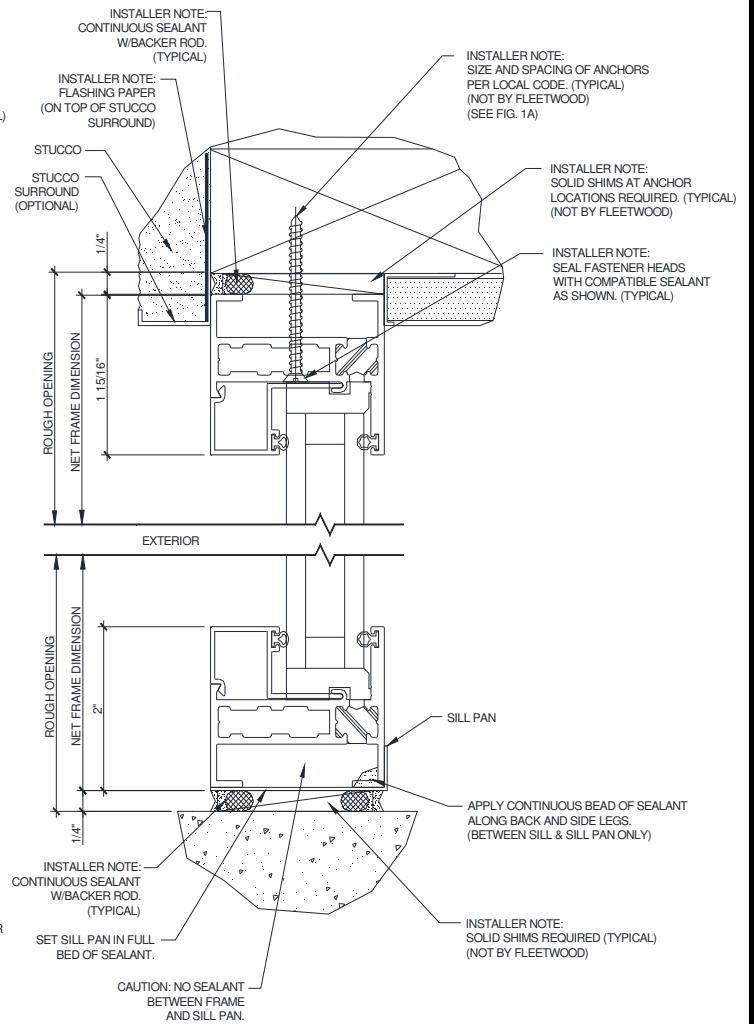

**Figure 10:**  
Block Frame Window Installation  
(Fixed Shown, Same for  
Casement / Awning)

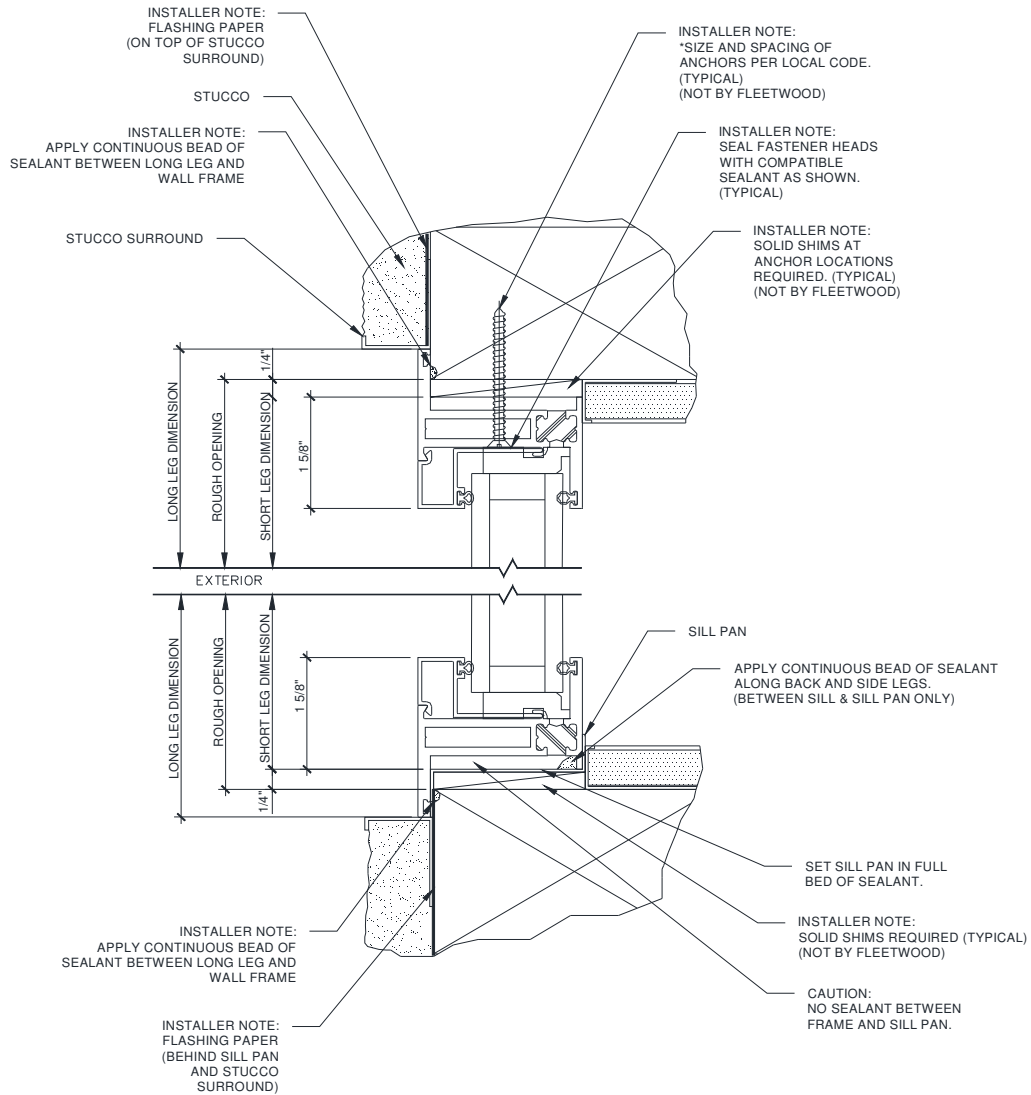

**Figure 11:**  
Uneven Leg Frame Window Installation  
(Fixed Shown, Same for Casement / Awning)



## VI. Glazing Instructions

**Note:** Glass stops must be removed before continuing.


### Dry Glazing Procedure

- Apply a 1/2" x 1/2" x 4" bead of compatible sealant from each corner on inner flange of panel (Figure 12).
- Install glass setting blocks, stagger setting blocks accordingly to support glass lites.


**Casement:** 1/4 points on the hinge side lower corner (bottom and side) and 1/4 points of the diagonal (top and side) to prevent "sash sag" (Figure 13).

**Awning and Fixed:** at 1/4 points into the top, bottom, and sides of the frame (Figure 14).


- Install glass to rest against the inner flange of the vent then install glass stops (Figure 14).

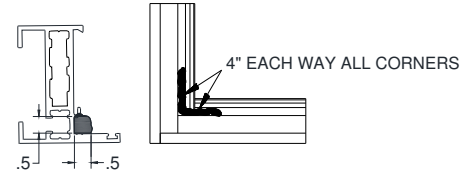

**Figure 12:**  
Sealant Location and Sizes

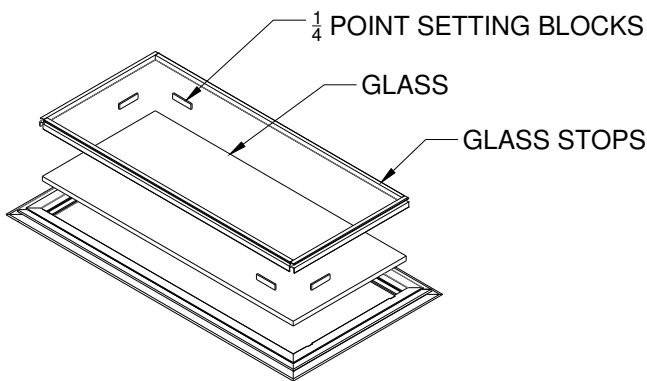

**Figure 13:**  
Glass Installation  
(Left Hinge-Casement Shown)

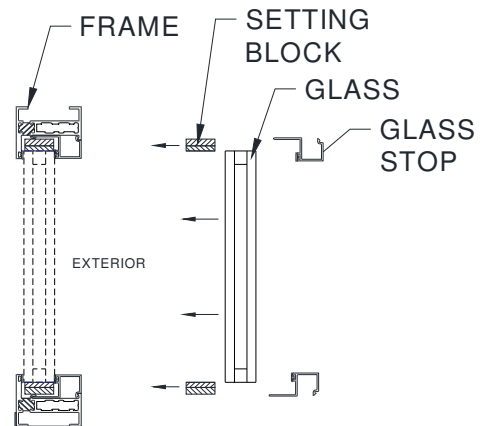


**Figure 14:**  
Setting Block Location  
(Fixed Shown)


### Alternate Glazing Procedure

**Note:** Applies to inside glazed or outside glazed where additional water protection is required.

1. Before glazing, apply a continuous bead of sealant to the inner frame (Figure 15).
2. After glazing, apply a continuous bead of sealant to the frame and glass (Figure 16).



**Figure 15:**  
Before Glazing Locations




**Figure 16:**  
After Glazing Locations


## VII. Corner Butt Glazing

**Note:** Corner windows will be butt glazed on site.


- Install window frame per instruction in Section IV.
- Align corner glass panels in frame leaving a 1/4" gap between glass for sealant (Figure 17). Orientation and sealant requirement options shown in Figures 18-20.
- Install glass stops following dry glazing procedure in Section V.

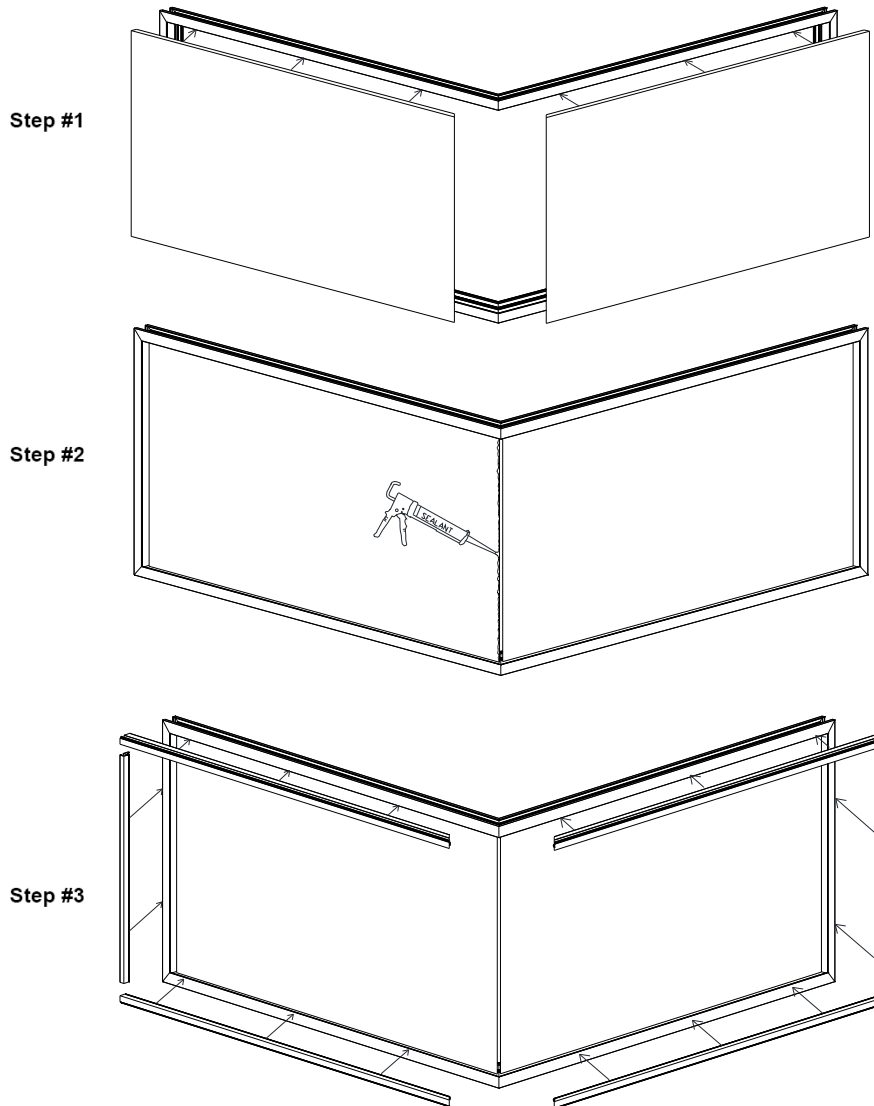


**Figure 17:**  
Corner Butt Glazing

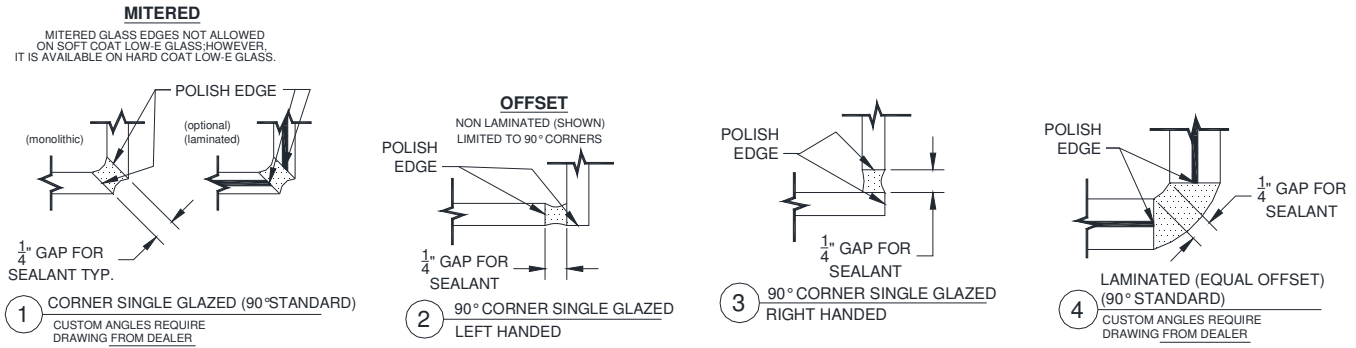

**Figure 18:**  
Single Glaze Butt Glazing Options

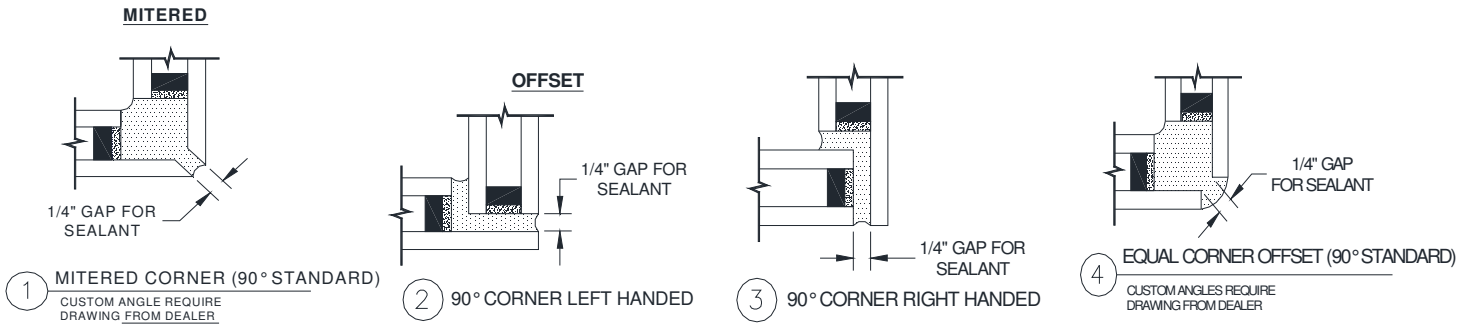

**Figure 19:**  
Dual Glaze Butt Glazing Options

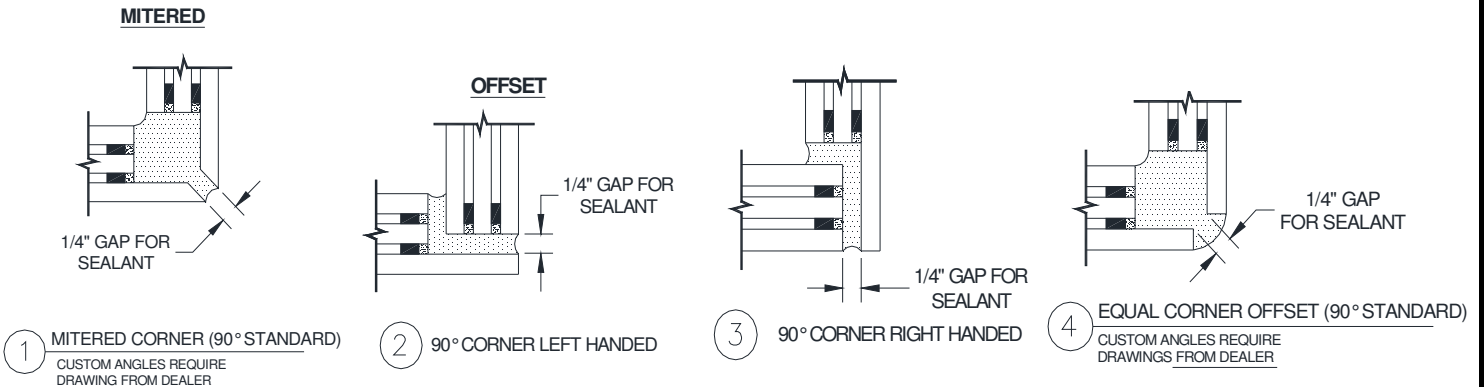

**Figure 20:**  
Triple Glaze Butt Glazing Options


**Note:** Sealant not provided by Fleetwood.

## VIII. Flashing after Installation


The flashing paper referred to in this document is Moistop or other code compliant flashing material that conforms to **Federal Specification UU-B-790a, Type 1, Grade A, Style 4**. The strips of flashing paper are to be no less than 9 inches wide (or wider as required by local codes). Flashing paper must be applied with galvanized nails or corrosion resistant staples. Flashing paper shall be applied in a weatherboard fashion around the full perimeter of the framed opening.

**Important Note:** The flashing paper referred to in this document is Moistop or other code compliant flashing material that conforms to Federal Specification UU-B-790a, Type 1, Grade A, Style 4. The strips of flashing paper are to be no less than 9 inches wide (or wider as required by local codes).


1. Once satisfied that the frame is watertight, and immediately prior to application of the flashing paper at the head and jambs, apply a continuous bead of sealant to the exposed mounting flange (nail-fin) at the top (head) and sides (jambs) of the installed frame. Also, apply sealant at corners of the frame and the full length of the seams where the nail fin flashing is mounted.
2. At each jamb, embed the flashing paper into the sealant onto mounting flange and fasten into place. The flashing paper should be cut sufficiently long enough to extend at least 3 in. past the weep-screed flashing and at least 6 inches above the head of the product (Figure 21).
3. Finally, at the head, embed the flashing into the sealant on the mounting flange and fasten into place. The flashing paper should be cut sufficiently long enough to extend past the flashing paper at each jamb by at least 3 in (Figure 22).
4. Weather resistant building paper should be applied in a weatherboard fashion to complete the installation (Figure 23).



**Figure 21:**  
Jamb flashing



**Figure 22:**  
Head Flashing




**Figure 23:**  
Building Flashing

**Note:** Where weather resistant building paper, insulating board, or other materials by other trades may constitute the primary weather barrier behind the exterior wall finish (i.e. stucco, masonry, siding, etc.), the owner / General Contractor are responsible to ensure that the weather barrier is continuous by effectively sealing the material to the product frame.

**Appendix A: Joining Sill-pans**

Follow the instructions below for joining multiple piece Sill-pans. Multiple piece Sill-pans are required on products with net frame widths greater than 14 feet (168 inches) and corner units.


1. Install Sill-pans per product installation instructions. *Caution: Apply a compatible sealant to the underside of the sill-pan at the seam joint.*
2. Cut a piece of adhesive backed waterproof material to fit the joint as specified in drawing below, A= 3/8". *Caution: Select waterproofing material that is compatible for your application. Waterproofing material must have an adhesive backing and be capable of withstanding the temperature ranges for your region.*
3. Remove excess sealant at joint on top of the sill-pan that may have migrated in during installation.
4. Remove the adhesive backing from the waterproof material and apply to the sill-pan. Waterproof material shall contain a fold on the interior water leg and attach to the sill-pan as shown.

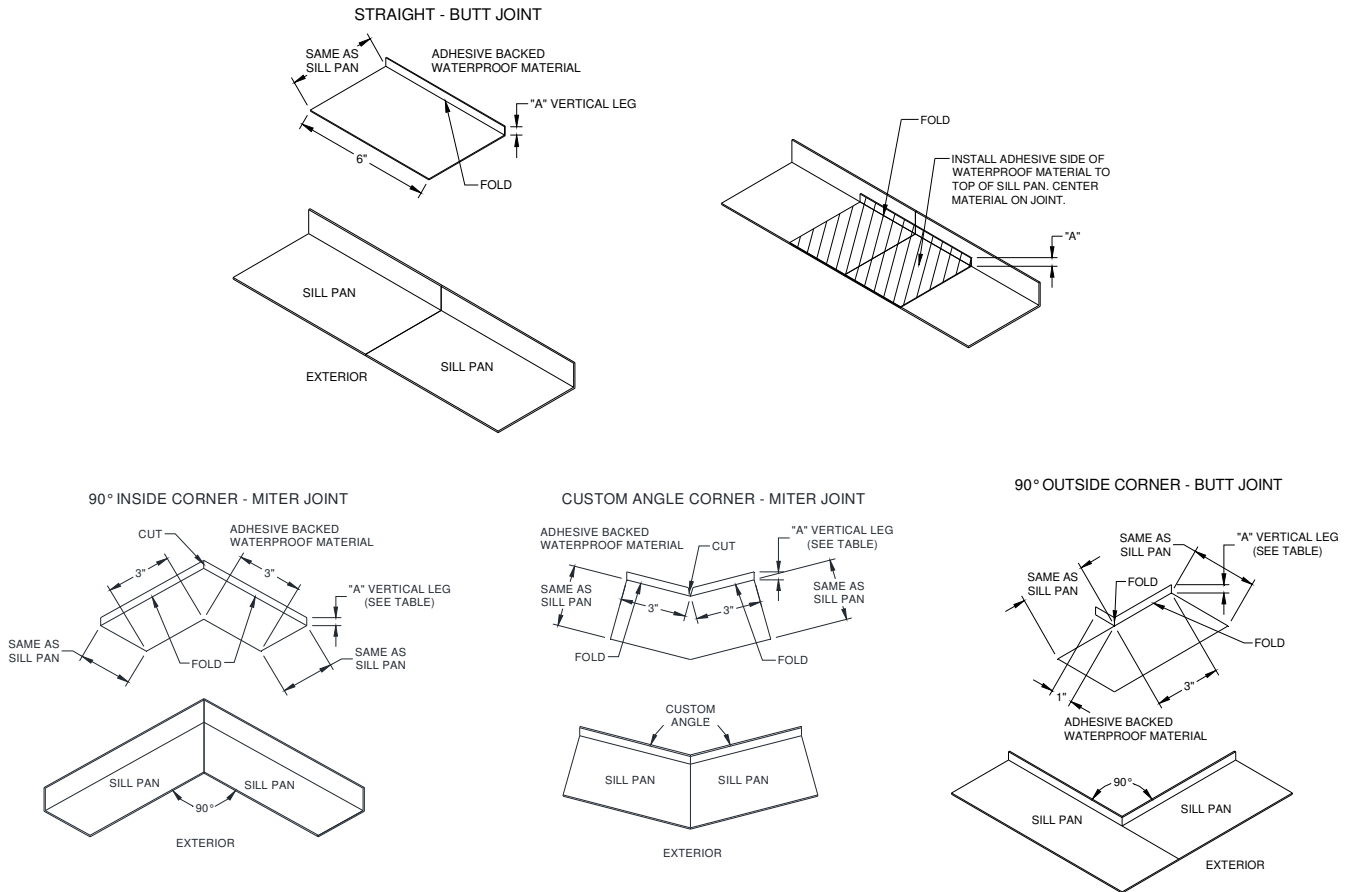

**Figure A1:**  
Showing multiple piece sill-pans joining

### Appendix B: Hinged Screen Installation

1. With a 2mm Hex wrench remove the set screw from all screen hinges (Figure B1).
2. Remove the hinge pins, resulting in the hinge separating into two pieces. The part not attached to the screen frame will be attached to the window frame in the predrilled hole locations.
3. Align the detached portion of the hinge to the predrilled holes on the frame. Fasten with the #8 FHP-A-UC screws provided (red bag).
4. Take the screen re-insert the hinge pins. Make sure while re-inserting pins that screen frame is not misaligned, any misalignment may affect the performance of the hinges.
5. Fasten the set screw in place.

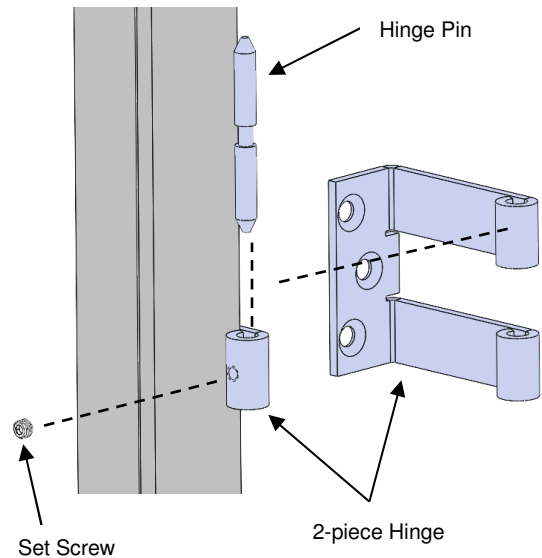


**Figure B1:**  
Hinged Screen Removal / Installation

### Appendix C: Panelized Window Installation (Block Frame Anchoring)


- Panelized windows will be shipped from the manufacturer with the vent secured to the frame.
- On block frame windows, the vent must be made operable before the window can be installed (anchored) into the rough opening.
- Removal of glass may be necessary on glass thickness > 1". Do not remove the glass unless necessary.

**Note:** The glass is secured in place by a 4" glazing bead in the corners.

1. Use a putty knife to carefully remove all glass stops.
2. Along the bottom [and depending on size, the sides / top] are fastener(s) for connecting the vent to the frame, remove the fastener(s) and save for later (Figure C1). While removing the fastener(s) be careful to not damage the glass.
3. After the fastener(s) are removed, the vent can be opened, the vent has two 4-bar hinges and opens similar to an awning (Figure C2). Follow the framing instructions in Section V Window Installation.
4. Once the frame is secured, close the vent and re-insert the vent fasteners.
5. Re-install the glass stops.

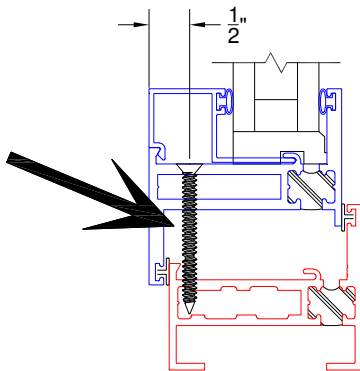

**Figure C1:**  
Vent Fastener Location  
(Block Frame Sill Shown)

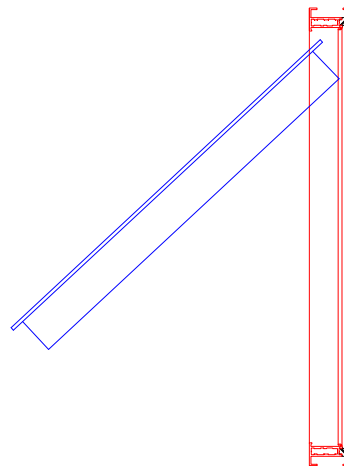

**Figure C2:**  
Vent In Open Position  
(Block Frame Shown)