



Series 350-T Window Fixed / Casement / Awning Ratings Summary

Specifications:

AAMA/WDMA/CSA/IS101/A440-08 CSA A440S1-09 (Non-Impact)
TAS 201,202,203 ([FL-14904](#), [FL-14907](#) HVHZ)
ASTM 1886e/1996e ([FL-14904](#), [FL-14907](#) Impact Non-HVHZ)

Frame:

- Block or Nail Fin Frames
- No Corner Configurations
- Outside Glaze Only
- Multi Lite Fixed Units
- Vertical / Horizontal TDL's
- Fixed Jamb Muller Frames

Fixed: (Non-Impact)

- 48" x 120" (O) – DP50 , Water: 12lbs

TDL Frames:

- 108" x 72" (O/O) – DP40 , Water: 12lbs

Jamb Muller:

- 181.25" x 96" (OIOIO) – DP35 , Water: 12lbs
- 120.5" x 96" (O/O/OIO/O/O) – DP35 , Water: 12lbs

Casements: ([FL-14904.8](#), [FL-14904.9](#), [FL-14904.10](#), [FL-14904.14](#), [FL-14904.15](#))

- Maximum frame size: 42" x 84" – DP+65/-65 (4-Bar Hinges or S.S. Butt Hinges)

Awnings: ([FL-14907.5](#), [FL-14907.6](#), [FL-14907.7](#))

- Maximum frame size: 40.25" x 82.25" – DP+65/-65 (4-Bar Hinges)
- Maximum frame size: 63.25" x 40.25" – DP+65/-65 (4-Bar Hinges)

Locks:

- Multi-point Locks Or Cam Handle Locks
(Cam handle locks can be used in conjunction with or in lieu of Multi-point Locks)
(MP locks may be used in conjunction with Roto Operators on awnings, based on height)
(MP lock standard on casement with Roto operator)

Handles:

- Cam Handles Or Roto Operators

Hinges:

- 4-Bar Hinges
- S.S. Butt Hinges (casement only)

Glazing Options:


HVHZ / Impact Non-HVHZ:

1.25" IG: 6mm-T/space/(3mm/.090 SGP/3mm-R)
1.25" IG: 6mm-T/space/(5mm/.090 SGP/5mm-R)
9/16" MONO: 6mm/.090 SGP/6mm-R or HS


Non-Impact:

1" or 1.25" IG: 6mm-R/space/6mm-R
1" or 1.25" IG: 5mm-T/space/5mm-T (DP +50/-50)

Sample Illustrations: **Fixed: (Non-Impact)**

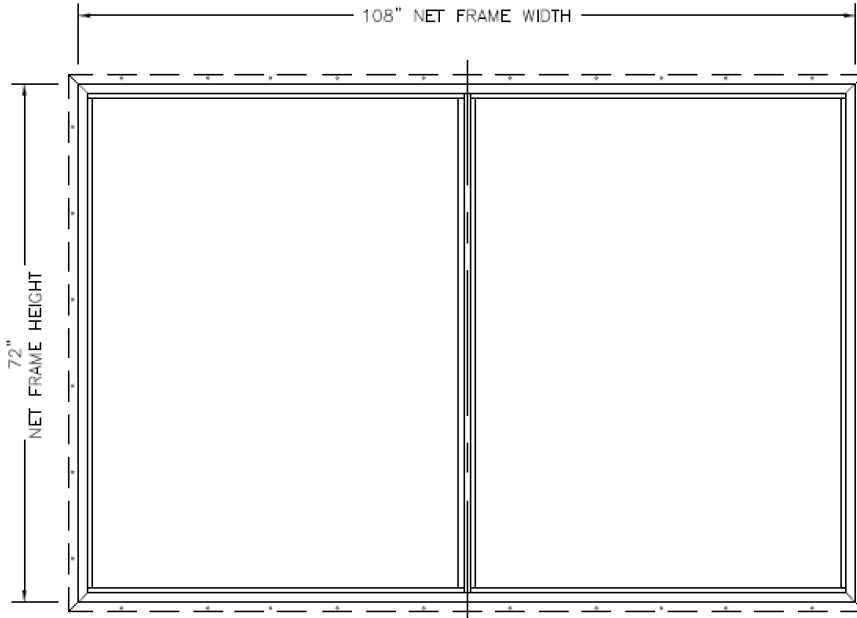


DP50, Water: 12lbs

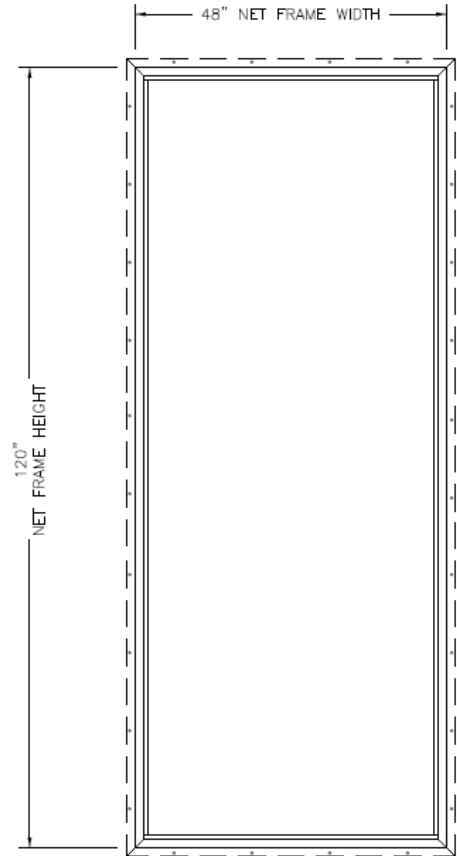


DP50, Water: 12lbs

Sample Illustrations: **Fixed: (Non-Impact, Muller)**

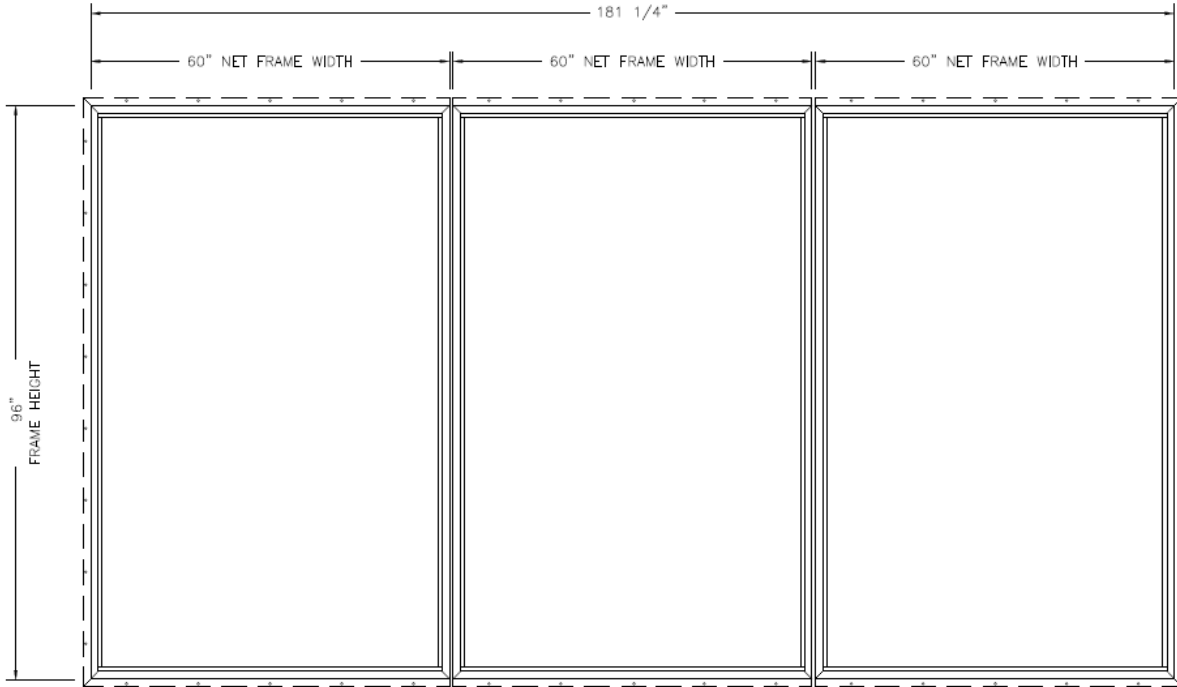


DP35, Water: 8.35lbs

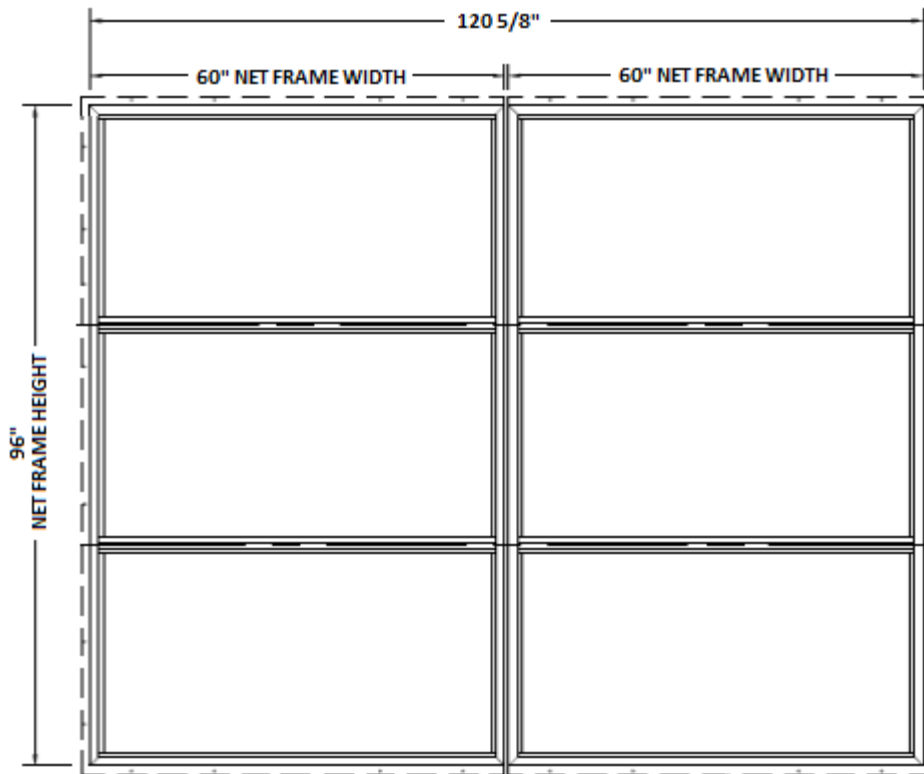

DP35, Water: 12lbs


Sample Illustrations: **Casement (Impact)**

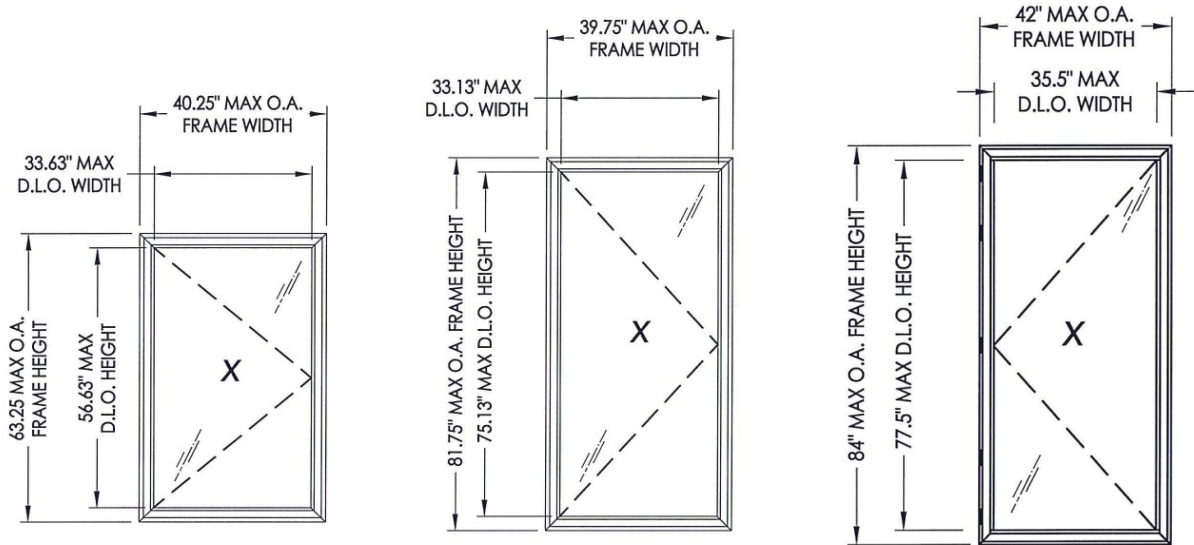

	Dry Glaze		Wet Glaze	
	4-Bar	Butt Hinge	4-Bar	Butt Hinge
MAX FRAME DIMENSIONS	40.25" X 63.25"	39.75" X 81.75"	42.0" X 84.0"	42.0" X 84.0"
DESIGN PRESSURE	+65 / -65	+65 / -65	+65 / -65	+65 / -65

[FL #14904.10](#), [FL #14904.15](#)

Sample Illustrations: **Awning (Impact)**

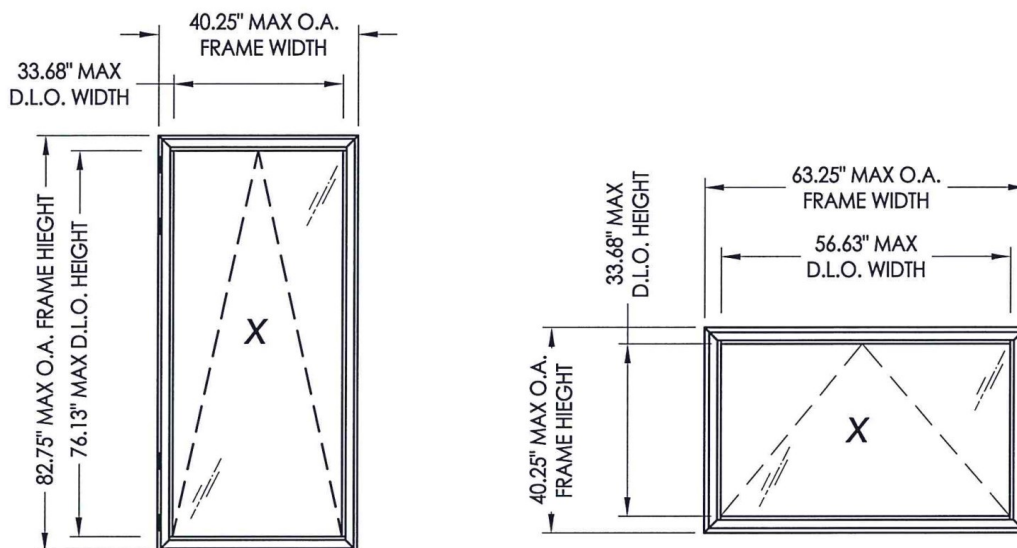

	4-Bar	4-Bar
	MAX FRAME DIMENSIONS	40.25" X 82.75"
DESIGN PRESSURE	+65 / -65	+65 / -65

[FL #14907.5](#)